

TOMA™ Stainless Washdown (IP67) palletizer

AUTOMATION MADE FRIENDUSTRIAL™



TOMA™

TOMA™ Stainless is designed for facilities where hygiene, compliance and contamination prevention are critical to daily operations.

Built with stainless steel construction, TOMA™ Stainless helps reduce residue accumulation and withstand harsh cleaning procedures and high-moisture environments, giving operators peace of mind during production and sanitation cycles while helping facilities stay compliant and keep production moving.



Safe, compliant operations

- Stainless steel design
- Washdown-ready construction
- IP67 robot protection
- Safe operator collaboration



Automation anyone can run

- No robotics expertise needed
- Intuitive touchscreen interface
- Start palletizing in minutes
- Quick setup and integration



Reliable performance every shift

- Designed for daily production use
- Automate repetitive palletizing
- Fast cleaning, less downtime
- One system. Multiple applications

Features

19" (48 cm) intuitive touchscreen interface accessible by anyone, no training required

Necton™ connectivity enables quick performance assessment to help maximize uptime

FANUC CRX-30iA collaborative robot arm for safe operation in demanding production environments

Quick-connect grippers handle various box weights and sizes for multi-SKU applications

Stainless steel construction designed for washdown environments and strict sanitation requirements

NEMA 4X enclosure and IP67 robot protection built for high-moisture facilities

Integrated electricals, pneumatics and controls enable quick and easy line integration

Options

One or two fully integrated 4-foot (1.2 m) TOMA™ infeed conveyors to ensure repeatable, precise case positioning

Integrated vacuum gripper with quick connect tool changer

Internet access for remote support and performance insights (Ethernet and WiFi)

24/7 support

Our expert team is available to answer questions and provide optimization advice as needed.

Starting price: CAD 170 000\$¹

Purchase and financing options available with monthly payment plans. Certain conditions apply.

☰ Payload*

Up to 66 lb (30 kg)³

☰ Capacity

Up to 20 cases per minute²

☰ Pallet height

Up to 102 in (2.59 m)

*Payload capacity may vary based on specific customer configurations and requirements. Please consult with one of our experts for more information.

Specifications

TOMA™ palletizer base

Weight

1590 lb (722 kg)

Electrical requirements

**120 V, 20 A, 60 Hz
or 230 V, 16 A, 50 Hz**

Air supply

13.5 SCFM @ 85 PSI

Operating temperature

41 °F to 95 °F (5 °C to 35 °C)

IP rating

IP67

TOMA™ conveyor

Length

48.4 in (1.2 m)

Width

25.8 in (0.65 m)

Height

**23.5 in to 34.5 in
(0.59 m to 0.88 m)**

Electrical requirements

**120 V, 15 A, 60 Hz
or 230 V, 16 A, 50 Hz**

Pallet dimensions³

Length

Up to 50 in (1.27 m)


Width

Up to 50 in (1.27 m)

Load height

Up to 102 in (2.59 m)

Applications




Cases

Trays



Pails




Bags



Other rigid containers

Conveyor configuration examples⁴

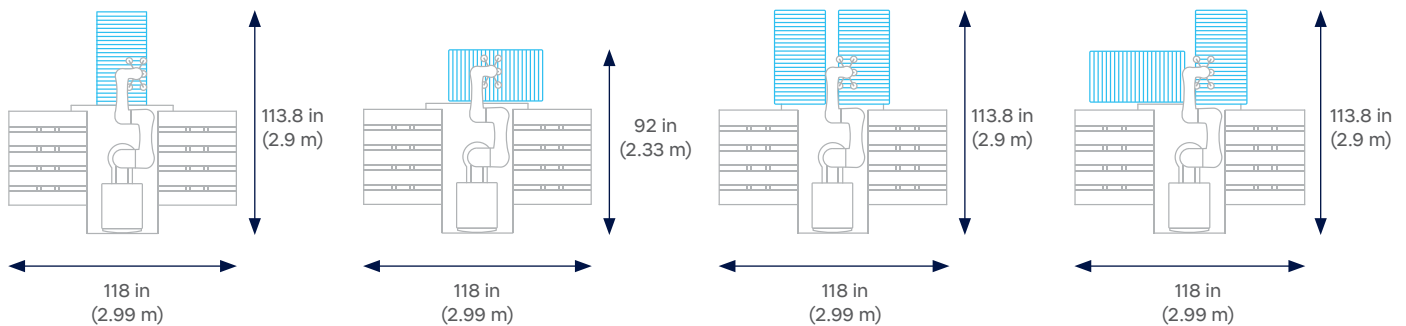

Visit tomarobots.com to start your Friendustrial™ journey

[Shop now](#)

¹ The price excludes the integrated gripper and TOMA™ conveyor, tax, shipping, and travel and accommodation for additional installation and commissioning services.

² Depending on product characteristics and equipment configuration.

³ While these specifications address typical applications, our solution is flexible and can work with heavier products and other pallet dimensions. Contact us to determine whether it will work for you.

⁴ Dimensions with 48" x 40" (1.2 m x 1 m) pallets. Other configurations available.



PT Systems and Automation



[TOMAROBOTS.COM](https://www.tomarobots.com)

The information contained in this brochure is based upon the latest information available at the time of publication and is designed to provide you with a general introduction to our products. We make no warranties or representations as to its accuracy. We are continually updating and improving our products and reserve the right to amend, discontinue or alter specifications and prices without prior notice. Premier Tech, TOMA™, MOVN™, Necton™, and Friendustrial™ are registered trademarks of Premier Tech Ltd.

© Premier Tech Ltd, 2026